


Line 5000 Emax Conductivity Depth Inversion mS/m  
Linear colour stretch 0 - 20

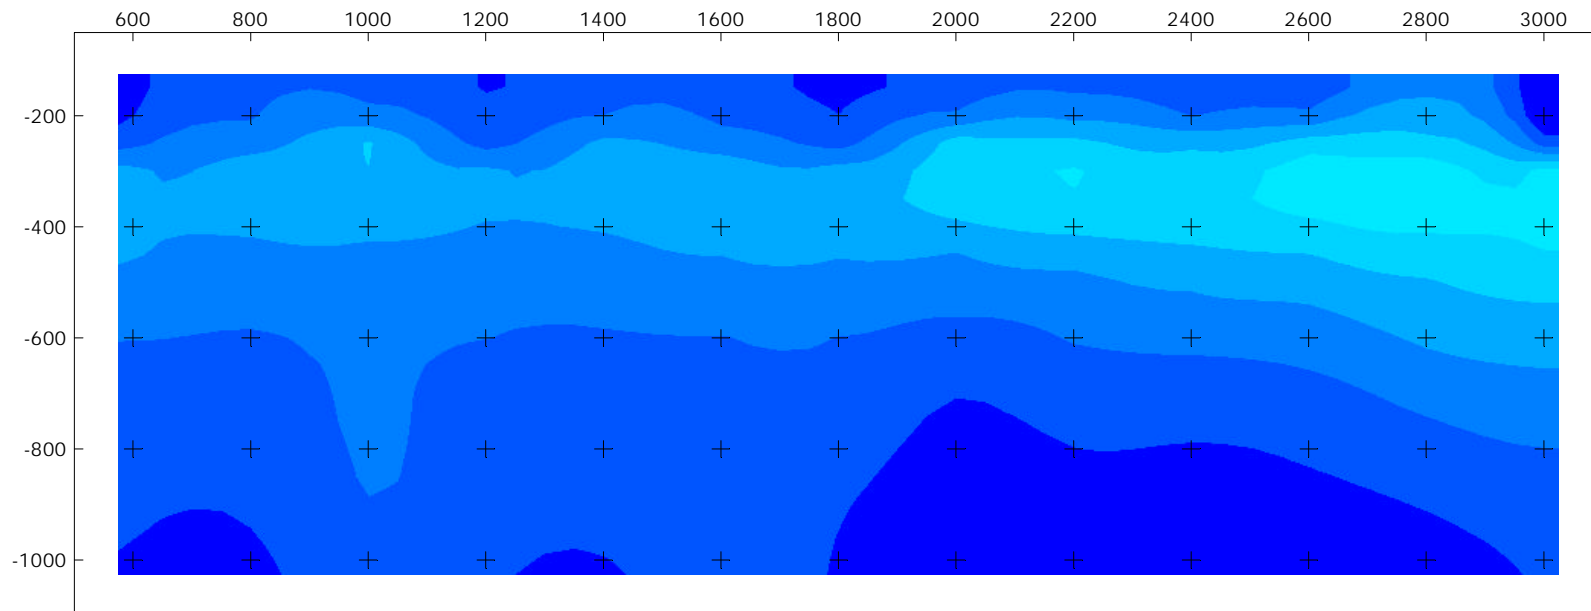

**Survey Parameters**

Configuration: In Loop  
 Loop Size: 200m  
 Tx: ZT30  
 Rx: Smartem  
 Sensor: RVR  
 Frequency: 8.333  
 Current: 28  
 No Chs: 28  
 Ramp Time: 350

**Window Times (Centers)**

1	0.05	16	2.825
2	0.1	17	3.425
3	0.15	18	4.225
4	0.2	19	5.025
5	0.275	20	5.825
6	0.375	21	7.025
7	0.475	22	8.625
8	0.575	23	10.225
9	0.725	24	11.825
10	0.925	25	14.225
11	1.125	26	17.425
12	1.325	27	20.625
13	1.625	28	23.825
14	2.025		
15	2.425		



**Riverdilla  
EPM 13420**

**TEM Survey 2002  
L5000  
TEM Profile  
and Emax Inversion**