


TEM LOG Profile Line 4000 >>>

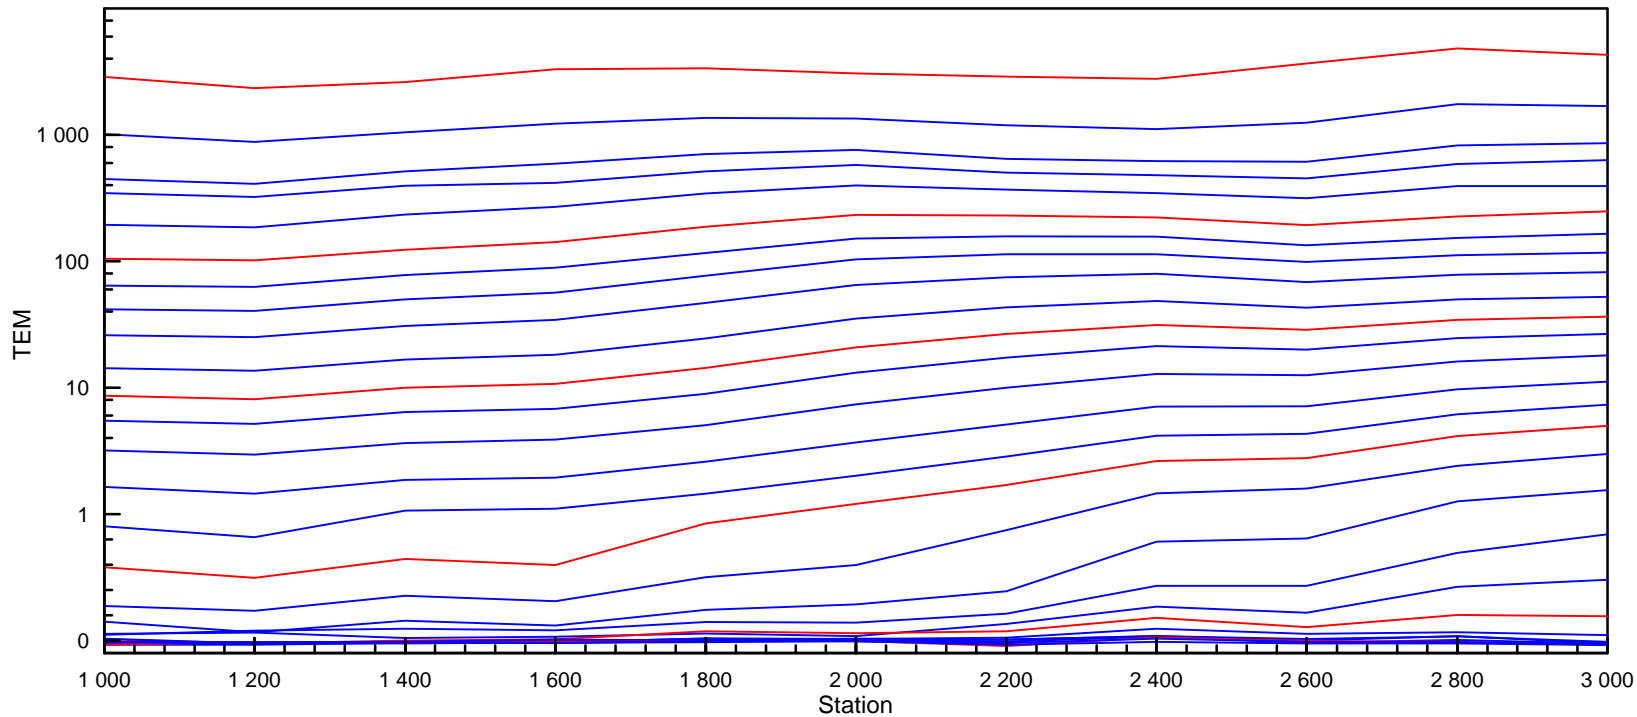


Survey Parameters

Configuration: In Loop
 Loop Size: 200m
 Tx: ZT30
 Rx: Smartem
 Sensor: RVR
 Frequency: 8.333
 Current: 28
 No Chs: 28
 Ramp Time: 350

Window Times (Centers)

1	0.05	16	2.825
2	0.1	17	3.425
3	0.15	18	4.225
4	0.2	19	5.025
5	0.275	20	5.825
6	0.375	21	7.025
7	0.475	22	8.625
8	0.575	23	10.225
9	0.725	24	11.825
10	0.925	25	14.225
11	1.125	26	17.425
12	1.325	27	20.625
13	1.625	28	23.825
14	2.025		
15	2.425		

Line 4000 Emax Conductivity Depth Inversion mS/m
 Linear colour stretch 0 - 20

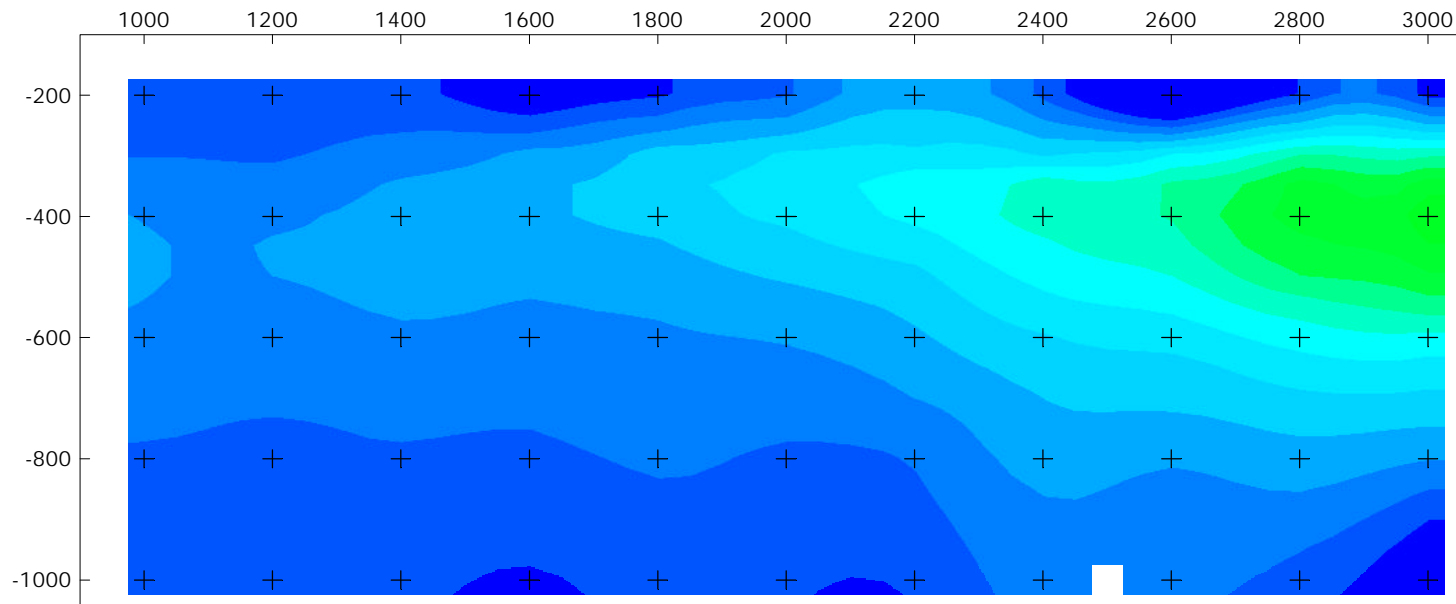

**Riverdilla
 EPM 13420**

**TEM Survey 2002
 L4000
 TEM Profile
 and Emax Inversion**